

## APPLICATION

The Nicotap® connector system is designed to connect pre-stripped copper or copper-coated wire and moisture seal the connection for direct burial. The kit includes one Nicotap or Nicopress Sleeve and high dielectric mastic.

## WIRE

Common wire combinations are listed in the tables below. Copper (solid or stranded) and copper-covered steel wire are approved for this product. Consult factory for availability of other wire combinations.

## FEATURES

- Easy to install
- Compatible with standard Nicopress crimp tools
- Tamper-proof connection
- Multi-wire range of connectors for gas, water, and fiber optic tracer wire
- Utility specified and approved

NICOTAP					
Line Wire Copper or Copper Covered Steel	Tap Wire Copper or Copper Covered Steel	Nicotap Cat. No.	Tool	Groove	Presses/ Half
#14 SOL	#14 SOL	T1-064-C	17-B4-TC	TC	4
#12 SOL	#14 SOL		31-DC	C	3
#12 SOL	#12 SOL				
#10 SOL	#14 SOL	T1-102X064-D	17-B4-TC 31-DC	TC D	4 4
#10 SOL	#12 SOL	T1-102X080-D	17-B4-TC 31-DC	TC D	4 4
#10 SOL	#10 SOL	T1-102-D	17-B4-TC 31-DC	TC D	4 4
#8 STR	#14 SOL	T1-128X080-J	31-CJ	J	4
#8 STR	#12 SOL				4
#8 STR	#8 STR				4

## APPLICATION DATA

### Application Temperature:

32°F to 90°F (0°C to 32°C)

### Operating Temperature:

239°F to -40°F (115°C to -40°C)

### Weight of One Kit: (1 splice and mastic)

.075 lbs. (34.02 gm)

### Storage: Do not store above 120°F (49°C)


UV Stable

## CONSTRUCTION

Connector — High Conductivity Copper

Mastic — Butyl Rubber

## TYPICAL DIMENSIONS\*

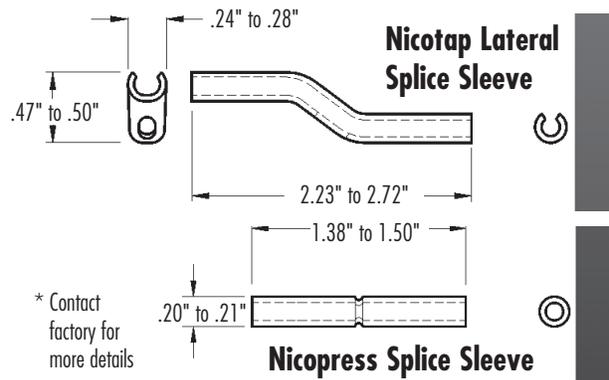

NICOPRESS SPLICE SLEEVE				
Line Wire Copper or Copper Covered Steel	Splice Sleeve Cat. No.	Tool	Groove	Presses/ Half
#14 SOL	1-064-C	17-B4-TC 31-DC	TC C	4 3
#12 SOL	1-080-C	17-B4-TC 31-DC	TC C	4 3
#10 SOL	1-102-C	17-B4-TC 31-DC	TC C	4 3
#8 STR	1-128-J	31-DJ	J	4

# NICOPRESS®

The National Telephone Supply Co.  
Manufacturer of Nicopress® Splicing Sleeves & Tools

Tel: 216-361-0221

Fax: 216-361-3111

email: [sales@nicopress.com](mailto:sales@nicopress.com)

web: [www.nicopress.com](http://www.nicopress.com)